

MC-USV


Supply voltage failover for MC routers or other devices with 24 V power supply

The function:

The MC-USV operates at an input voltage of 12 – 30VDC, charging integral lithium-ion rechargeable batteries. The output provides a consistent 24VDC power supply to connected devices. Should the input voltage fail, the charged battery is used to buffer output voltage until power falls below the minimum battery voltage or the charging process is resumed. An LED display provides information on the current status. In addition to this, two signal outputs provide information on input voltage failure or low battery charge status. Devices connected to the outputs, for instance MC routers, are able to use the signals to transmit power supply status notifications via SMS or e-mail.

LED signalling:

LED	Description
Vin	Input voltage OK
Load	Battery is being charged
Error	Battery charging error
Accu	Battery voltage OK
Vout	Output voltage OK (> 20VDC)

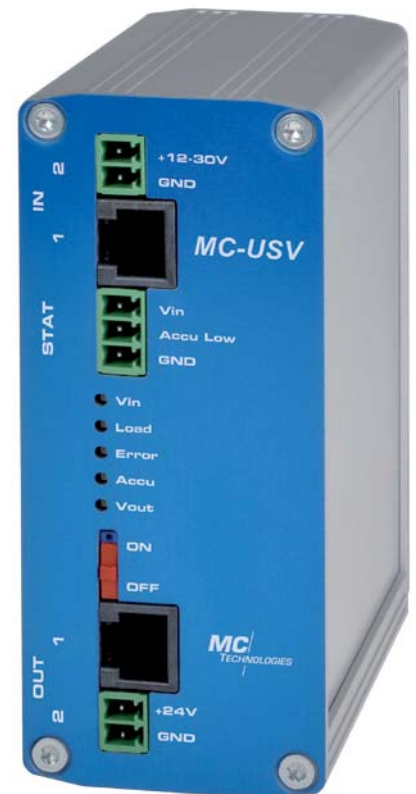

Performance characteristics:

- Uninterrupted power supply to a device (e.g. MC router) in the event of a power failure or voltage fluctuations
- Integral Li-Ion rechargeable battery 7.4V/2200mAh
- Rechargeable battery monitoring and charging indicator
- "Digital Out" signal outputs for Power Failure and minimal Battery Voltage
- LED display for Power Failure, Error, Charging, Battery Voltage OK and Output Voltage OK
- Short circuit-proof; overload and open circuit-proof
- Can be turned off manually to prevent self-discharging during storage
- Can be used with original MC-Router mains adapters (RJ12 jack) or external power supplies (screw terminal)

Technical data:

Input voltage: 12 – 30VDC

Output voltage: 24VDC

Output current: Approx. 300 mA

Capacity: 2200 mAh

Degree of efficiency: Approx. 60–90 %

Mounting: On a DIN rail

Dimensions (W x H x D): 44 x 105 x 84 mm

