

MC0114009


Stationsantenne IP67

ISM 868, GSM 900/1800, PCS 1900

ISM/GSM



**made
in
Germany**

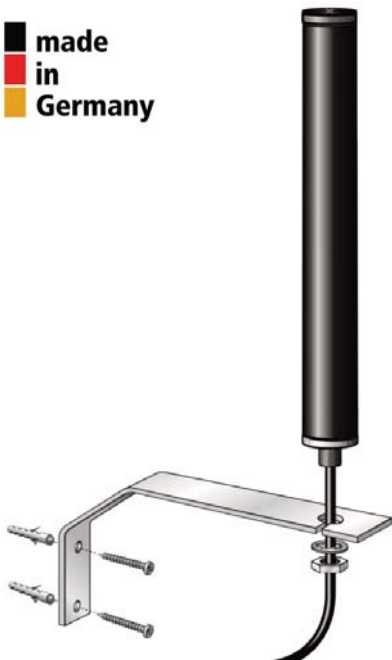

Technische Daten/technical data:

Frequenzbereich/ Frequency band:	ISM 868; GSM 900/1800/1900 850-960/1710-1880/1850-1990 MHz
Kabel/Cable:	5,0 m Low-Loss*
Steckverbinder/Plug:	FME (female)**
Impedanz/Impedance:	50 Ohm
Leistung/Power:	max. 20 Watt
Anpassung/VSWR:	≤ 2 : 1
Gewinn/Gain:	2 dBi
Temperaturbereich/ Temperature range:	- 40°C ... + 70°C
Strahler/Ermittler:	Länge ca. / length approx. 219 mm
Lieferung/Delivery:	inkl. Wandhalter und Schrauben/ incl. wall holder and screws
Material Winkel/Angle:	AlMgSi0,5 mit Oberfläche Plastpulver (Polyester) RAL 9006

* weitere Ausführungen/further designs:

5m Kabel/cable	FME (female) oder/or SMA (male)
10m Kabel/cable	FME (female) oder/or SMA (male)
15m Kabel/cable	FME (female) oder/or SMA (male)
30m Kabel/cable	FME (female) oder/or SMA (male)



** andere Steckverbinder und Kabellänge auf Anfrage/
other connectors and cable length on request

Richtdiagramme

Directional Diagrams

Polarisation:
vertikal bei 900 MHz
Vertical polarisation
at 900 MHz

Polarisation:
vertikal bei 1800 MHz
Vertical polarisation
at 1800 MHz



Anpassung Return Loss

