

# MC0114065-M-LTE800

## Fibreglass Antenna 1.45 m




**790 - 960 MHz**

**GSM/UMTS/LTE/ISM**



### Technical Data:

Frequency:	790 - 960 MHz (LTE800, GSM850/900, UMTS900, ISM868)
Bandwidth:	170 MHz
Impedance:	50 ohm
VSWR:	< 2:1
Polarisation:	Vertical
Gain:	6 dB (Marine), 3 dBd, 5.1 dBi
Max. Input Power:	200 W
Lightning Protection:	Direct ground
Color:	White and chrome
Height:	1445 mm
Mounting:	On 1" threaded pole (G1"-11 thread) with Revolving Nut Kit or on optionally brackets
Mounting place:	On mast or deck
Materials:	PU-painted glassfibre, copper, PTFE, PE and chromed brass
Survival Wind Speed:	55 m/s (125 mph)
Operating temperature:	-55C to +70C (IEC 60068-2-1, IEC 60068-2-2)
Connector:	N-female
Cable:	No cable supplied
Ingress Protection:	IP66
Vibration:	IEC 60068-2-6, IEC 60068-2-64

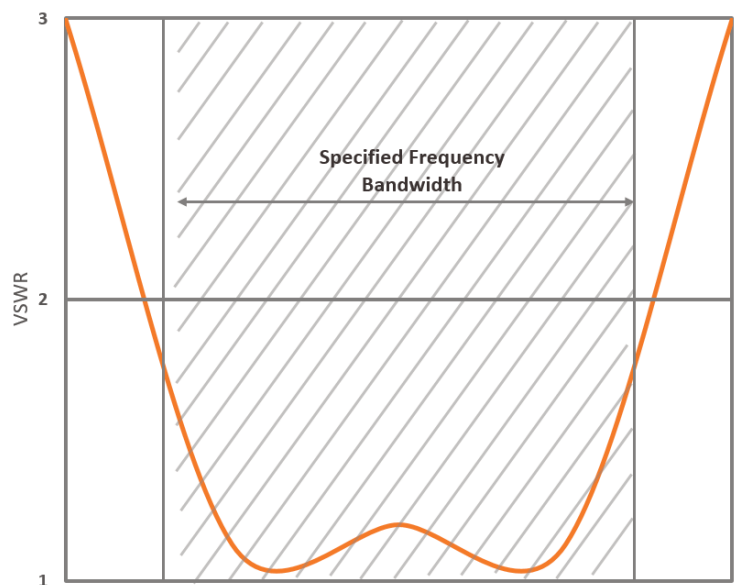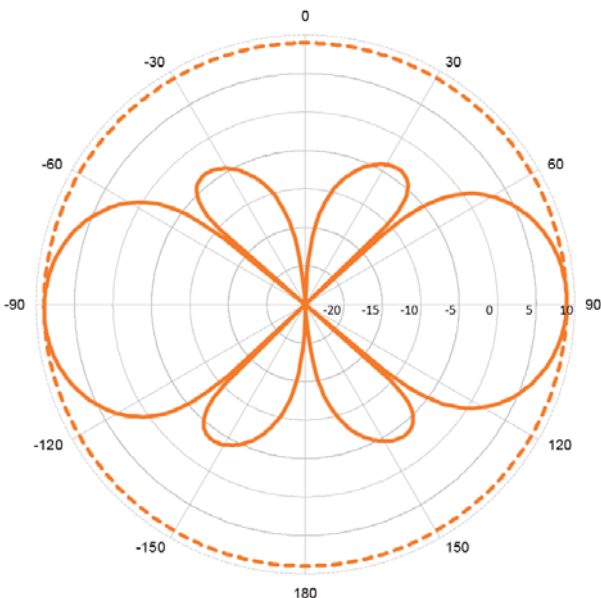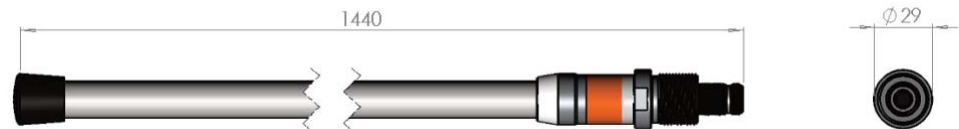

01/2017