


# MC0114085-A

**824-960MHz/1710-2170MHz**

**GSM/ISM/UMTS**

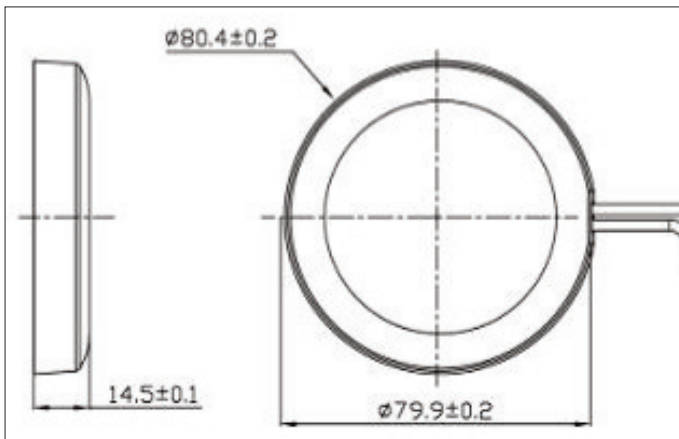

Frequency Range:	824-960MHz / 1710-2170MHz
V.S.W.R:	< 2.0
Polarization:	Linear
Gain:	2dBi
Impedance:	50Ω
Cable:	RG174
Connector:	FME (female)
Radome Material:	ABS
Mounting Method:	Adhesive
Operating Temperature:	-40°C to +85°C
Relative Humidity:	Up to 95%
Ingress Protection:	IP65
Vibration:	10 to 55Hz with 1.5mm amplitude 2hours
Environmentally Friendly:	ROHS Compliant