


Pos.	Stk./ pcs	Bezeichnung/ Description	Typ-Nr./ Type-No.	Bemerkung/ Remark
①				
②	1	Chassisbaubuchse Bulkhead p.c.b. mount jack	3573.42.2412.211	Laenge / Length
③	1	Kabel Cable	siehe tabelle rechts ! see chart on the righth side !	
④				
⑤				
⑥				
⑦				

Pos.	Stk. pcs	Kabel cable	Kunden Artikel-Nr. customer part-no.	Kabeltyp cable type	Zuschnittsl. cut length l	Gesamtl. L Total length L
③	0,5	K-1994-01	- ④	Hirose U.FL-2LP-066-A-300	141,65±1	150,0±1,5
④			-			
⑤			-			
⑥			-			


Anzahl der Kabel / No. of cable Stueck / Pcs

Kabelzuschnitt / Stripping dimension Kabelzuschnitt / Stripping dimension Bemerkungen / Remarks

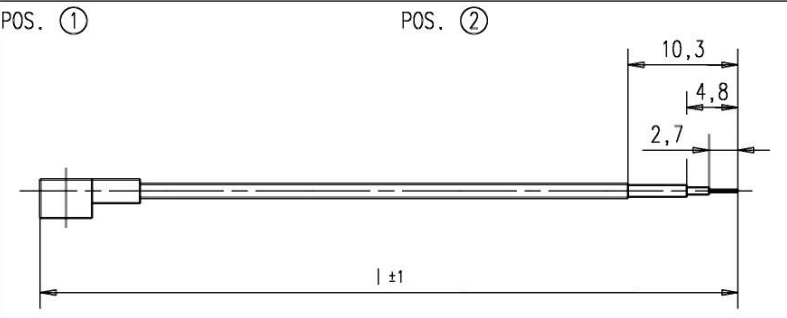

Pos. 1
Aussen/outer :
Innen/inner :
Pos. 2
Aussen/outer : crimp \varnothing 2,67
Innen/inner : löten / solder

Pruefspannung: 500Veff/50Hz
Test-voltage : 500Veff/50Hz ④

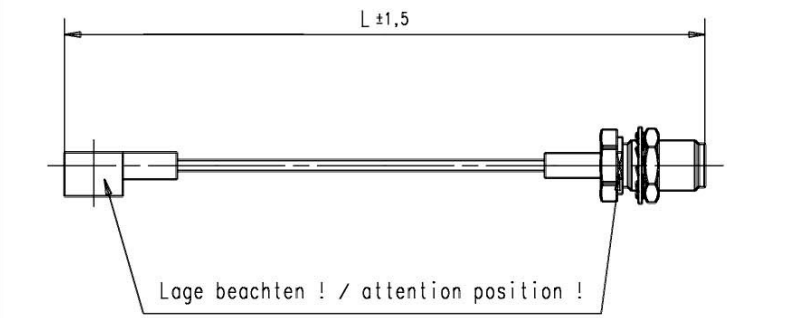

general tolerance	scale: 2:1	
AA-CS-12	date	name
generate		HF-Leitung Flexibel
checked		RF-flexible Cable Assembly
Norm		
40345		
		MC1213 Adapter 227
		Rev. d