


# MC0114246 GSM/UMTS Stations-Antenne

## GSM 850/900/1800/1900 MHz / UMTS

Aussenantenne für stationäre Wandmontage Outdoor antenna for fix wall mounting

**GSM/ISM/UMTS**

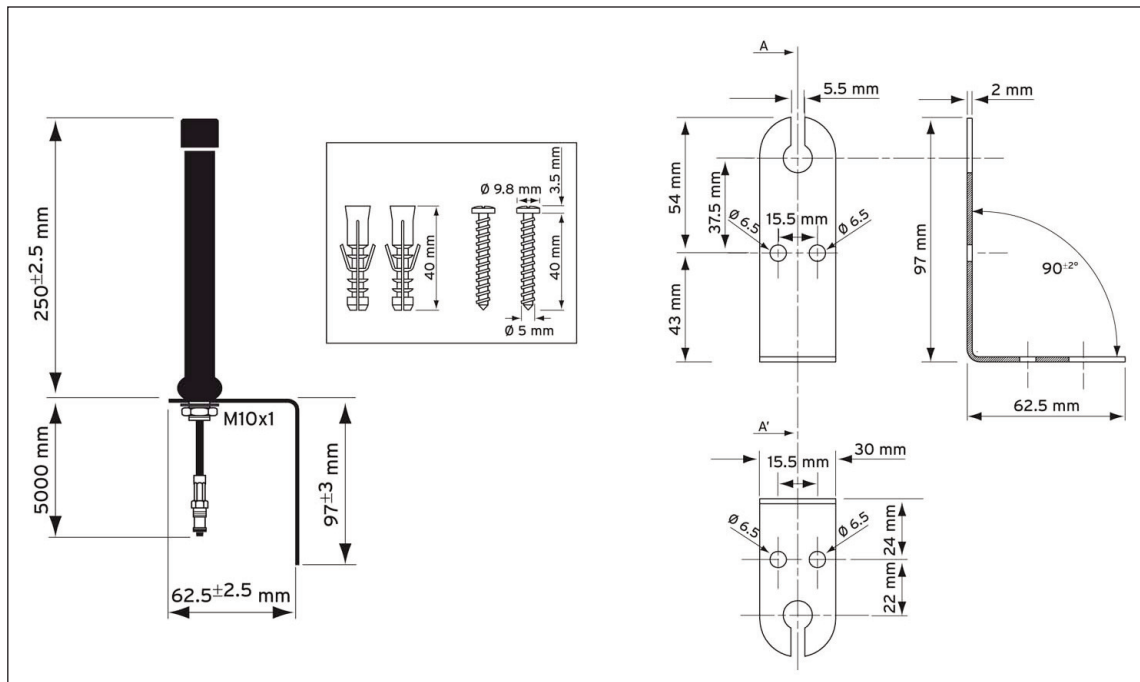

### Technische Daten / Technical data:

Frequenzbereich / Frequency range

GSM 850:	824 – 894 MHz
GSM 900:	880 – 960 MHz
GSM 1800:	1710 – 1880 MHz
GSM 1900:	1850 – 1990 MHz
UMTS:	1920 – 2170 MHz

Impedanz / Impedance

50 Ohm

Gewinn / Gain

2.14 dBi

Anpassung / Return loss (VSWR)

< 2,0

Leistung max. / Power

max. 10 W

Polarisation / Polarization

omnidirectional

Kabeltyp / Cable type

RG 58

Kabellänge / Cable length

5000 +50 mm

Anschluss / Connector

FME female (optional SMA male)

Abmessungen / Dimensions (H x Ø)

250 mm x 16 mm (ohne Halter / without bracket)

Material Gehäuse / Housing material

PE UV-resistent

Material Halter / Bracket material

Edelstahl / stainless steel

Gewicht / Weight

360 g

Temperaturbereich / Temperature range -30° C – + 80° C

Schutzklasse / Protection class

IP66 (acc. IEC 60529)